


端口线序	线色	定义
1	空	E
2	蓝	A
3	蓝黑	A
4	绿	B
5	绿黑	B
6	红	24V
7	红白	GND
8	黑	右极限信号(常闭)
9	黑白	左极限信号(常闭)
10	--	NC

端口定义

### 技术参数

步进角	1.8°	电阻	1.6 (1±10%) Ω
相数	2	电感	2.3 (1±20%) mH
绝缘耐压	1 MINUTE (500V DC)	额定电流	1.5A
绝缘等级	B级/绕组	输出推力	50N at 10r/s
重量	约600g	步长	0.03MM
行走平行度	0.02MM	重复定位精度	±0.005MM

### 接线图

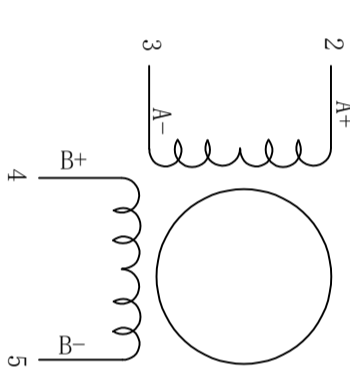

### 外形尺寸: unit=mm

一般公差 TOLERANCES (EXCEPT AS NOTED)		±0.2	
材 质 MATERIAL		制 图 DRAWN	设计 DESIGNED
表面处理 FINISH		检 图 CHECKED	检 印 CHECKED
0	23-10-28	0	23-10-28
1	23-10-28	1	23-10-28
2	23-10-28	2	23-10-28
3	23-10-28	3	23-10-28
4	23-10-28	4	23-10-28
5	23-10-28	5	23-10-28
6	23-10-28	6	23-10-28
7	23-10-28	7	23-10-28
8	23-10-28	8	23-10-28
9	23-10-28	9	23-10-28
10	23-10-28	10	23-10-28

滑台类型	行程	导程	丝杆类型	精度等级
微型滑台	100MM	6MM	滚珠丝杆	P

品名 TITLE	智能微滑台规格书
图号 DWG. NO.	Y-23-1028-0

比例 SCALE	1:1
变更图号 REVISION NO.	
变更事项 REVISIONS	
设计 BY	许元好
备 注 NOTE	

深圳锐特精密智能有限公司	1/1
--------------	-----